

Mounting THE BBQ GURU To a Weber or Similar Charcoal Grill

Top Mount



Fig. 1


Simply place the Draft Inducer on one of the four damper holes on the top of the lid and the Deflector Plate on the inside of the lid.

Make sure that the Draft Inducer sits against the damper hole with the spider closest to the lid surface.

Screw together hand tight.

Point Deflector Plate opening down and toward fire and position lid so that The BBQ Guru is opposite the fire.

Place blower into adaptor and you are ready to cook.

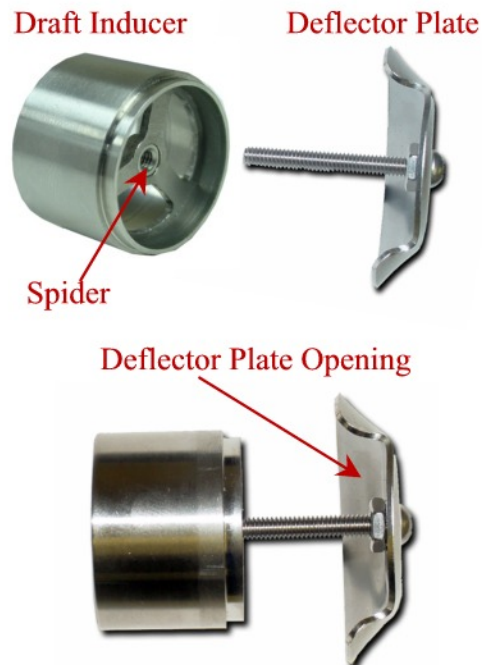

Bottom Mount



Fig. 2



Fig. 3

To bottom mount your BBQ Guru on a Weber Kettle, you need to punch 1" hole in the bottom left side of the pot. This hole should be located at a 90° angle from the front handle as you look at the front of the kettle. (see Fig. 3)

To make it easy, use a Hole Saw or Step Drill to drill the 1" hole in the bottom of the kettle underneath the level of the charcoal grate.

Make sure that the Draft Inducer sits against the damper hole with the spider closest to the lid surface.

Screw together hand tight.

Position the Deflector Plate Opening down, on the opposite side from the fire.

Note: Bottom mounting allows the lid to be completely removed and lets the thermocouple wires enter from the bottom. The top damper can then be closed most of the way enabling tight temperature control.